


asustor

XPANSTOR 12R AX7012R




Expanding Storage Space

The Xpanstor 12R helps you expand your storage space while enhancing data management flexibility and efficiency. NAS devices serve as a centralized storage solution that offers convenient file sharing, remote access, and backup all in one. When attached to an ASUSTOR NAS, the Xpanstor 12R provides more drive bays for easy capacity expansion, making it especially suitable for enterprise environments that require extensive data storage and management.

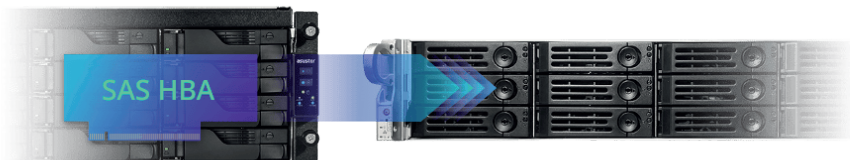


Easily Configure Using Storage Manager

The Xpanstor 12R appears in ADM natively and drives appear within Storage Manager, which makes managing and configuring the attached expansion unit easy. Use Storage Manager to set up RAID configurations as well as utilize snapshot features to further enhance data security and reliability.

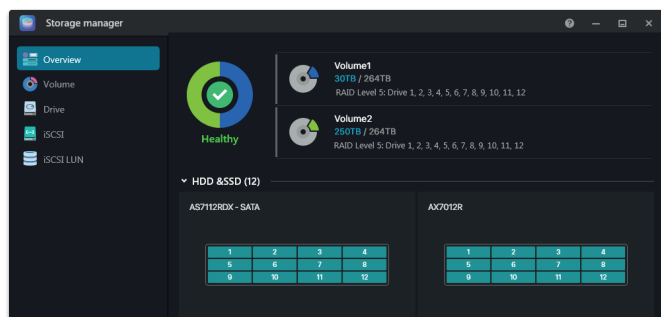

Dual Redundant Power Supplies and Hot-Swappable Fan Design

The Xpanstor 12R is equipped with two 650W redundant power supplies and three hot-swappable fans, which increases overall operational efficiency and fault tolerance. Both power supplies can automatically switch to the other in the event one fails, ensuring continuous operation and data security. The hot-swappable fan design allows for fan replacement without downtime, effectively reducing maintenance and upgrade costs.

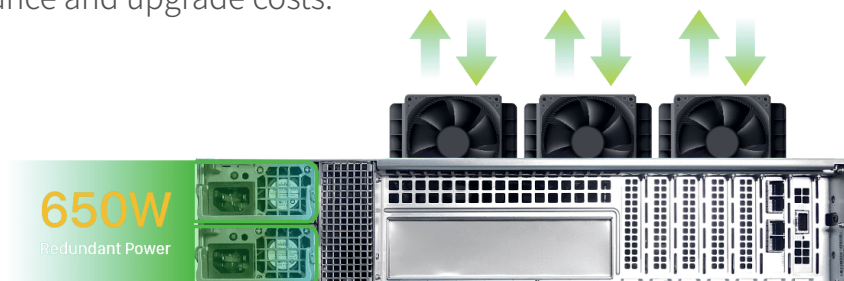

First-Class Product Warranty

The Xpanstor 12R comes with a five year warranty. ASUSTOR continues to make customer service a priority in providing the highest standard of after-sales service and technical support.



Hardware Specifications

XPANSTOR 12R/AX7012R

| | |
|-------------------------------|---|
| Chip | SAS35X28R |
| Flash Memory | 2MB SRAM |
| Expansion Port | SAS IN-port : 2 SAS Out-port: 2 |
| Compatible Drive Type | 3.5" SAS 2 HDD; 3.5" SAS 3 HDD; 3.5" SATA 3 HDD |
| Drive Bays | 12 |
| Supports Hot Swappable Drives | Yes |
| System Fan | 3x 80x38mm hot-swap cooling fan(s) |
| Power Supply Unit / Adapter | 650W x2 |
| Input Power Voltage | 100V to 240V AC |
| Certification | FCC, CE, UKCA, VCCI, BSMI, C-Tick, BIS, KCC, EAC |
| Operation Temperature | 0°C~40°C (32°F~104°F) |
| Humidity | 5% - 95% (non-condensing) |
| Dimensions | 89 (H) x 437 (W) x 647 (D) mm |
| Weight | 13.15 (kg) / 29 (lb) |
| Warranty | 5 years |



ASUSTOR Inc.

3F, No.136, Daye Rd., Beitou Dist., Taipei City 112, Taiwan Tel: +886 2 7737 0888 www.asustor.com

Designs and specifications are subject to change without notice.

© ASUSTOR Inc. ASUSTOR and all other ASUSTOR product names are trademarks or registered trademarks of ASUSTOR Inc.

All other product and company names mentioned herein are the trademarks of their respective owners.

Dealer Seal